


FD60 EI60

(PAIR) SQUARE EDGE



PRODUCT DENOMINATION : FD602 FIRE RATED TIMBER DOORSETS

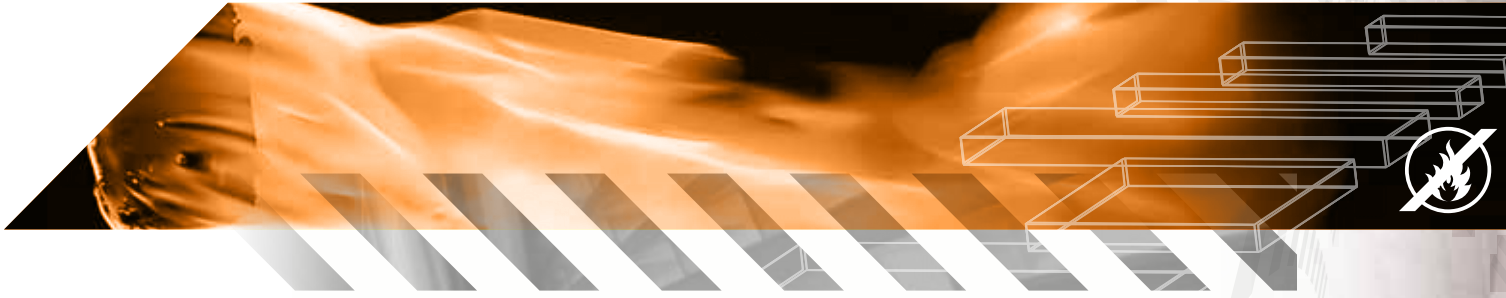

DOOR LEAF :

- Huet solid timber core. Thickness: 51 mm with hardwood stiles all round.
- Equal or unequal leaves with rebated meeting stile.
- Doors can be held in open position using electro-magnetic device.
In the event of a fire, doors will assume closed position without a door coordinator.

LIPPINGS :

Lippings are available in Hardwood (our choice) or Beech or European Oak by request, these can be fitted to the two long edges.

DOOR FRAME :

- Square lining frame with loose stop.
- Varieties of widths with a choice of extension linings are available.
- Available in Hardwood (our choice) or Beech or European Oak by request.

IRONMONGERY :

- 4 hinges (88 x 100mm) per leaf.
- Cut-outs/mortises are available to suit a variety of locks and handles.
- **Door closers required to respect fire resistance degree.**

PERIMETER SEALS :

- Intumescent seals factory fitted within the frame.
- Can be offered with a smoke seal within the frame and the leaves.

CHOICE OF DOOR FACINGS :

- Primed.
- Wood veneers species to match approved samples.
- Laminated.
- White paint finish + other colour available by request.
- Engraved to a wide choice of standard and bespoke finishes.

VISION PANEL GLAZING OPTIONS :

- Integrity and insulation (EI).
- Integrity and radiant heat control with partial insulation (EW).
- **Safety rating Class A, B, C (BS 6206).**

Configuration case	Dimensions- Cut out (mm)	PYROBEL 16 EI30/EW60 Class - B	PYROBEL 25 EI60 Class - A
Case 1	750*200	▪	▪
Case 2	750*200+700*200	▪	▪
Case 3	750*200+500*200	▪	▪
Case 4	1240*240	▪	▪
Case 5	300-400 DIA	▪	▪

OPTIONS :

- Frame can be lacquered, stained or varnished.
- Ventilation grid.
- Kick / push plates.



FD60 EI60

(PAIR) SQUARE EDGE

PRODUCT DENOMINATION : FD602
FIRE RATED TIMBER DOORSETS

